


MULTILIFT ULTIMA 14S


POWER RANGE HOOKLIFTS

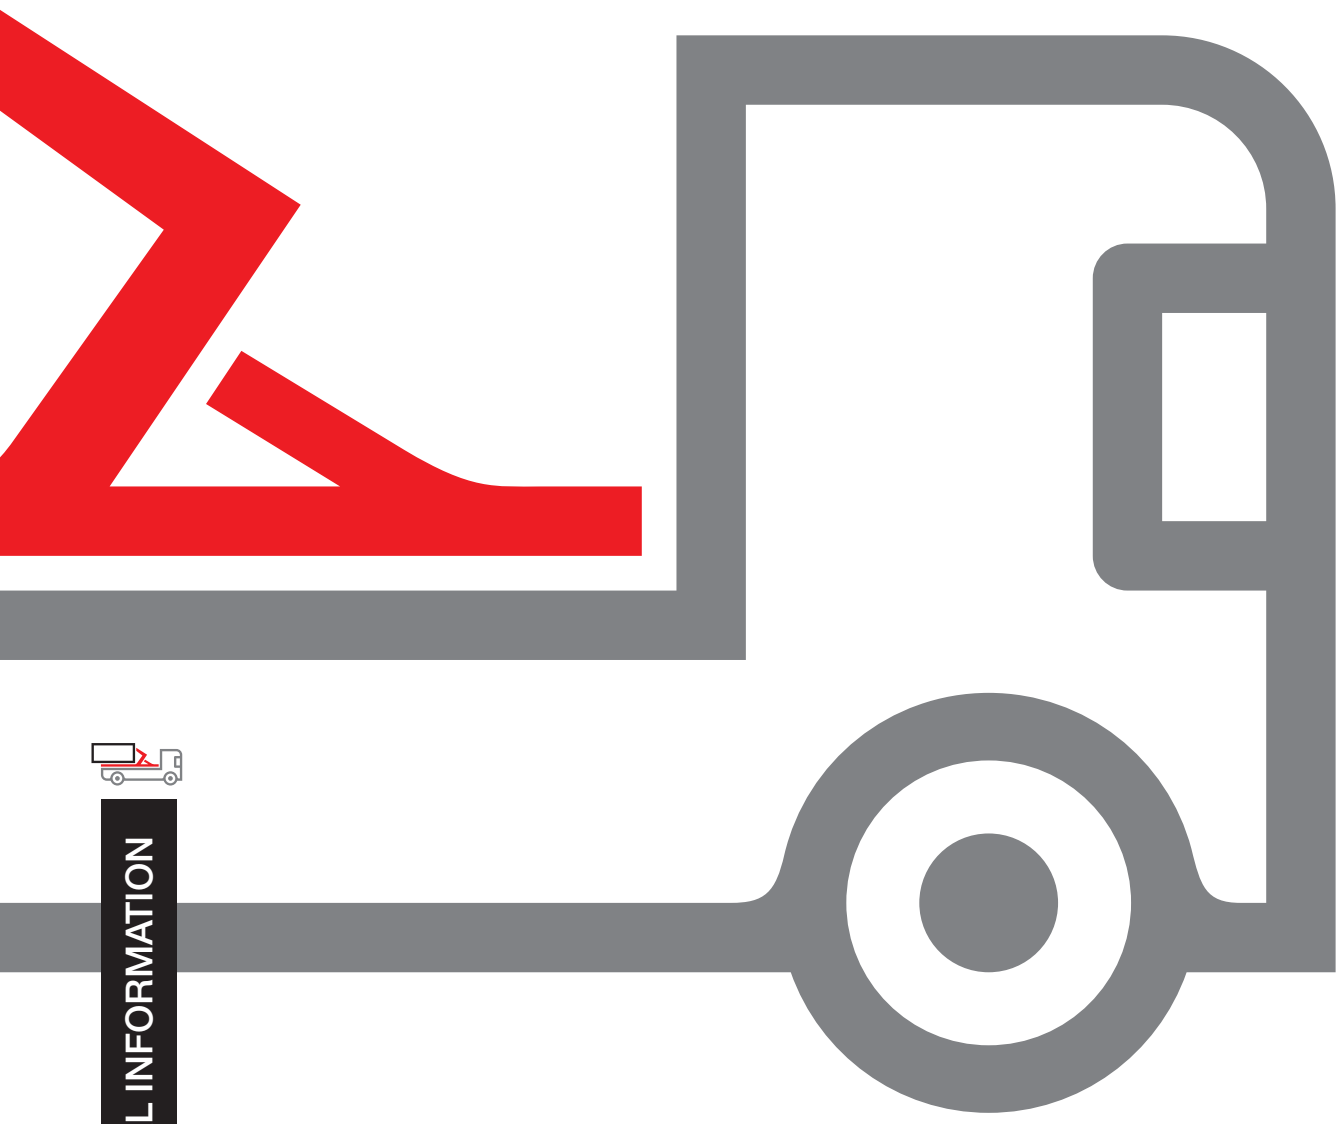

TECHNICAL INFORMATION

MULTILIFT ULTIMA 14S BASIC DATA

Type	ULTIMA 14S		
Vehicle type	2 axle		
GVW of the vehicle (t)	19		
Capacity (t)	14		
G-length	41	43	46
System weight (kg) *	1600	1630	1660
Tipping angle (°)	50	47	50
Max. operating pressure (MPa)	30		
Recommended oil flow (l/min)	60		

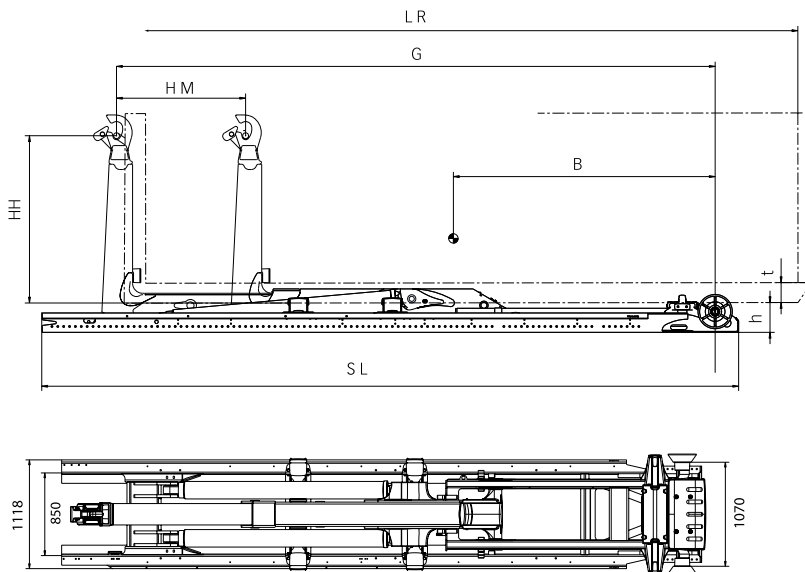

Primary dimensions

Technical data	ULTIMA 14S.41	ULTIMA 14S.43	ULTIMA 14S.46
LR = Body length (min – max) (m) internal	3.4 – 5.1	3.6 – 5.3	3.9 – 5.6
SL = Subframe length (mm)**	4808	4958	5308
B = Centre of gravity (mm)	2180	2290	2450
G = Exact G-length (mm)	4080	4270	4580
HM = Horizontal movement (mm)	900		
h = Installation height (mm)***	230		
t = Min free tunnel height (body) (mm)***	125		
HH = Hook height (mm)***	1575		
BW = Body width (mm)***	1152		

* Weight includes hydraulic body locking and excludes oil tank and oil.

** The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Hiab Multilift dealer.

*** Varies depending on country and body standard

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.