


# MULTILIFT ULTIMA 26


## POWER RANGE HOOKLIFTS

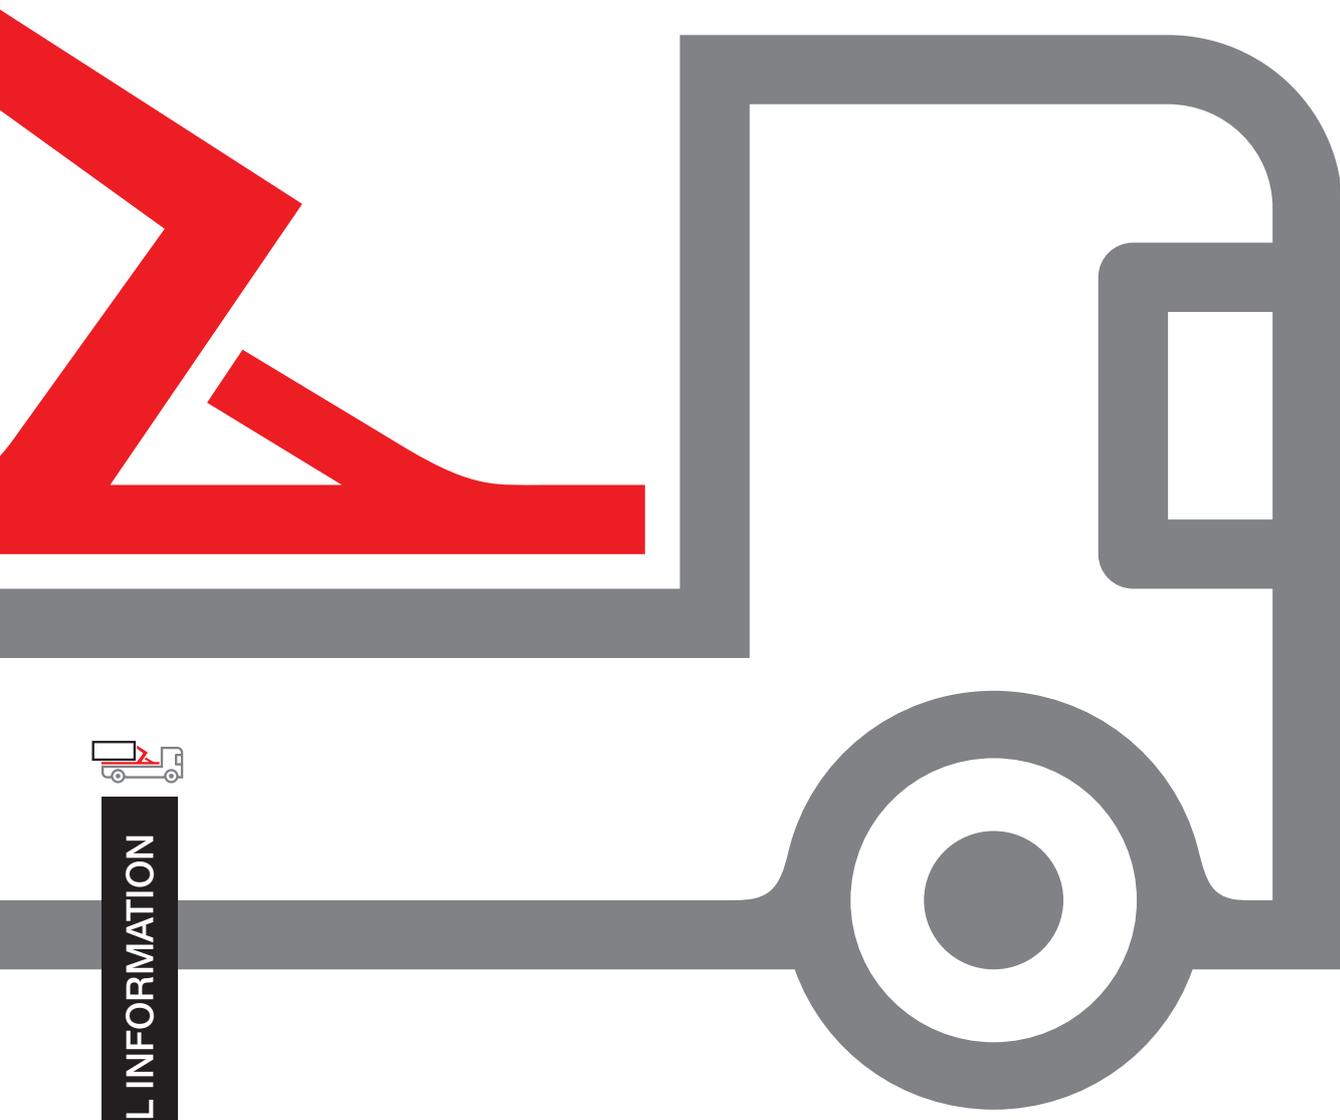

TECHNICAL INFORMATION

# MULTILIFT ULTIMA 26S BASIC DATA

Type	ULTIMA 26S	
Vehicle type	4 axle	
GVW of the vehicle (t)	32	
Capacity (t)	26	
G-length	55	70
System weight (kg) *	2500	3080
Tipping angle (°)	49	50
Max. operating pressure (MPa)	30	
Recommended oil flow (l/min)	100	

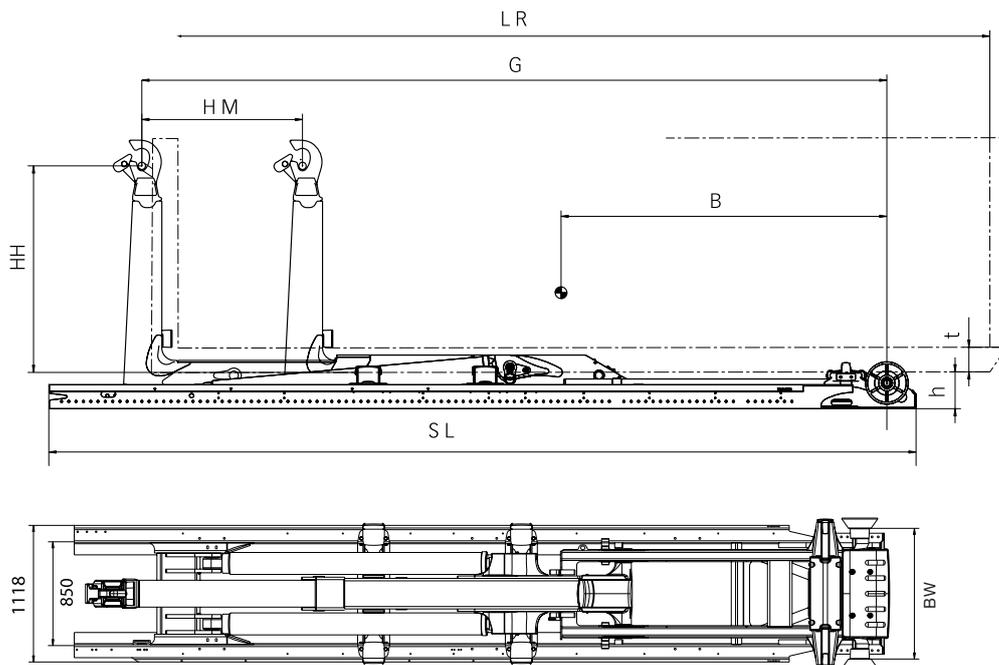

## Primary dimensions

Model	ULTIMA 26S.55	ULTIMA 26S.70
LR = Body length (min – max) (m) internal	4.7 – 6.5	5.7 – 8.0
SL = Subframe length (mm)**	6583	7783
B = Centre of gravity (mm)	3050	3900
G = Exact G-length (mm)***	5480	6980
HM = Horizontal movement (mm)	1000	1450
h = Installation height (mm)****	270	
t = Min free tunnel height (body) (mm)****	125	
HH = Hook height (mm)****	1575	
BW = Body width (mm)****	1152	

\* Weight includes hydraulic body locking and excludes oil tank and oil.



\*\* The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Hiab Multilift dealer.

\*\*\* Exact G-Length can be +20mm/-40mm from dimension in the table depending on the hook height and body standard

\*\*\*\* Varies depending on country and body standard

# MULTILIFT ULTIMA 26Z BASIC DATA

Typ	ULTIMA 26Z	
Vehicle type	4 axle	
GVW of the vehicle (t)	32	
Capacity (t)	26	
G-length	55	61
System weight (kg) *	2800	2870
Tipping angle (°)	49	
Max. operating pressure (MPa)	30	
Recommended oil flow (l/min)	100	

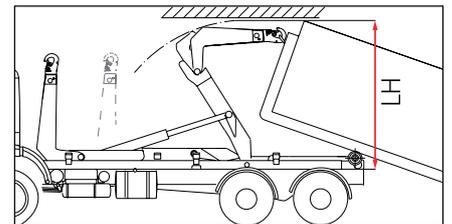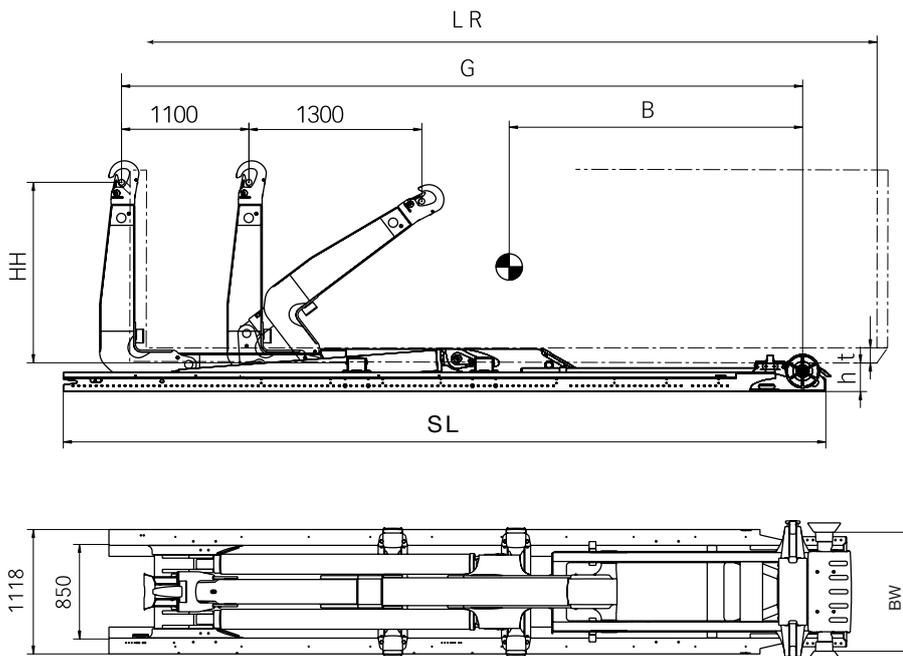

## Primary dimensions

Model	ULTIMA 26Z.55	ULTIMA 26Z.61
LR = Body length (min – max) (m) internal	3.5 – 6.5	4.0 – 7.4
SL = Subframe length (mm)**	6283	6783
B = Centre of gravity (mm)	3050	3500
G = Exact G-length (mm)***	5480	6080
LH = Min. working height (mm)	2800	3066
h = Installation height (mm)****	250	
t = Min free tunnel height (body) (mm)****	125	
HH = Hook height (mm)****	1575	
BW = Body width (mm)****	1152	

\* Weight includes hydraulic body locking and excludes oil tank and oil.

\*\* The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Hiab Multilift dealer.

\*\*\* Exact G-Length can be +20mm/-40mm from dimension in the table depending on the hook height and body standard

\*\*\*\* Varies depending on country and body standard

# BUILT TO PERFORM

Hiab is the world's leading provider of on-road load-handling equipment, intelligent services and digitally connected solutions. Hiab's offering encompasses class-leading load handling equipment including HIAB loader cranes, LOGLIFT and JONSERED forestry and recycling cranes, MOFFETT truck-mounted forklifts, MULTILIFT demountables, and tail lifts under ZEPRO, DEL, and WALTCO brands. As the industry pioneer, our commitment is to increase efficiency in our customers' businesses and to shape the future of intelligent load handling.

[hiab.com](https://hiab.com)

Hiab is part of Cargotec Corporation.

[cargotec.com](https://cargotec.com)

**Disclaimer.** We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.

[hiab.com](https://hiab.com)



**MULTILIFT**