



MULTILIFT


MULTILIFT ULTIMA 14S POWER RANGE HOOKLIFTS



TECHNICAL INFORMATION

MULTILIFT ULTIMA 14S BASIC DATA

Type	ULTIMA 14S					
Vehicle type	2 axle					
GVW of the vehicle (t)	19					
Capacity (t)	14					
G-length	41	43	46	51	53	56
System weight (kg) *	1600	1630	1660	1760	1840	1860
Tipping angle (°)	49	47	50	49	52	52
Max. operating pressure (MPa)	30					
Recommended oil flow (l/min)	60					

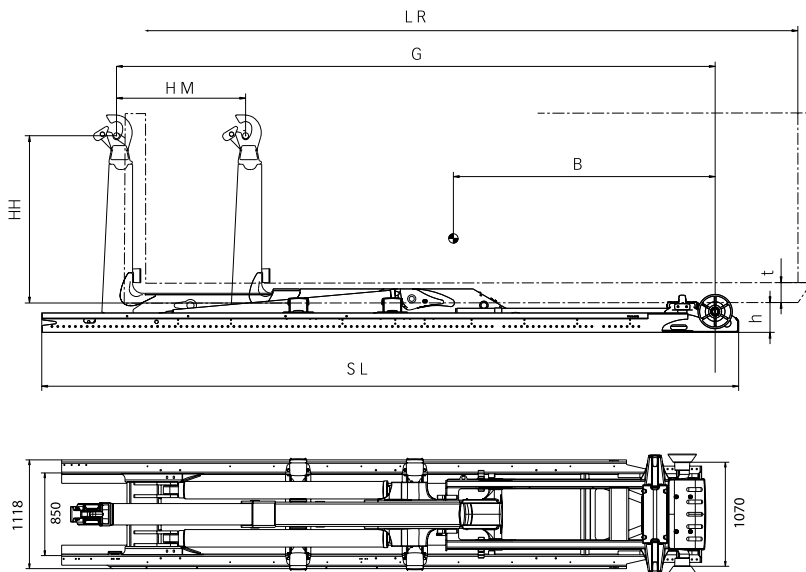

Primary dimensions

Technical data	ULTIMA 14S.41	ULTIMA 14S.43	ULTIMA 14S.46	ULTIMA 14S.51	ULTIMA 14S.53	ULTIMA 14S.56
LR = Body length (min - max) (m) internal	3.5 - 5.1	3.7 - 5.3	4.0 - 5.6	4.3 - 6.1	4.5 - 6.4	4.5 - 6.6
BW = Body width (mm)***	1070 / 1120 / 1152					
SL = Subframe length (mm)**	4808	4958	5308	5758	6508	6508
B = Centre of gravity (mm)	2180	2290	2450	2700	2850	2950
G = Exact G-length (mm)	4080	4270	4580	5080	5360	5560
HM = Horizontal movement (mm)	900	900	900	1100	1100	1300
t = Min free tunnel height (body) (mm)***	125 / 105					
h = Installation height (mm)***	230 / 250					
HH = Hook height (mm)***	1400 / 1425 / 1450 / 1570 / 1575					

* Weight includes hydraulic body locking and excludes oil tank and oil.

** The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Hiab Multilift dealer.

*** Varies depending on country and body standard

Hiab Multilift equipments meet the demands set forth in the EU Machine Directive and they are CE marked.

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.