


MULTILIFT ULTIMA 30S


POWER RANGE HOOKLIFTS

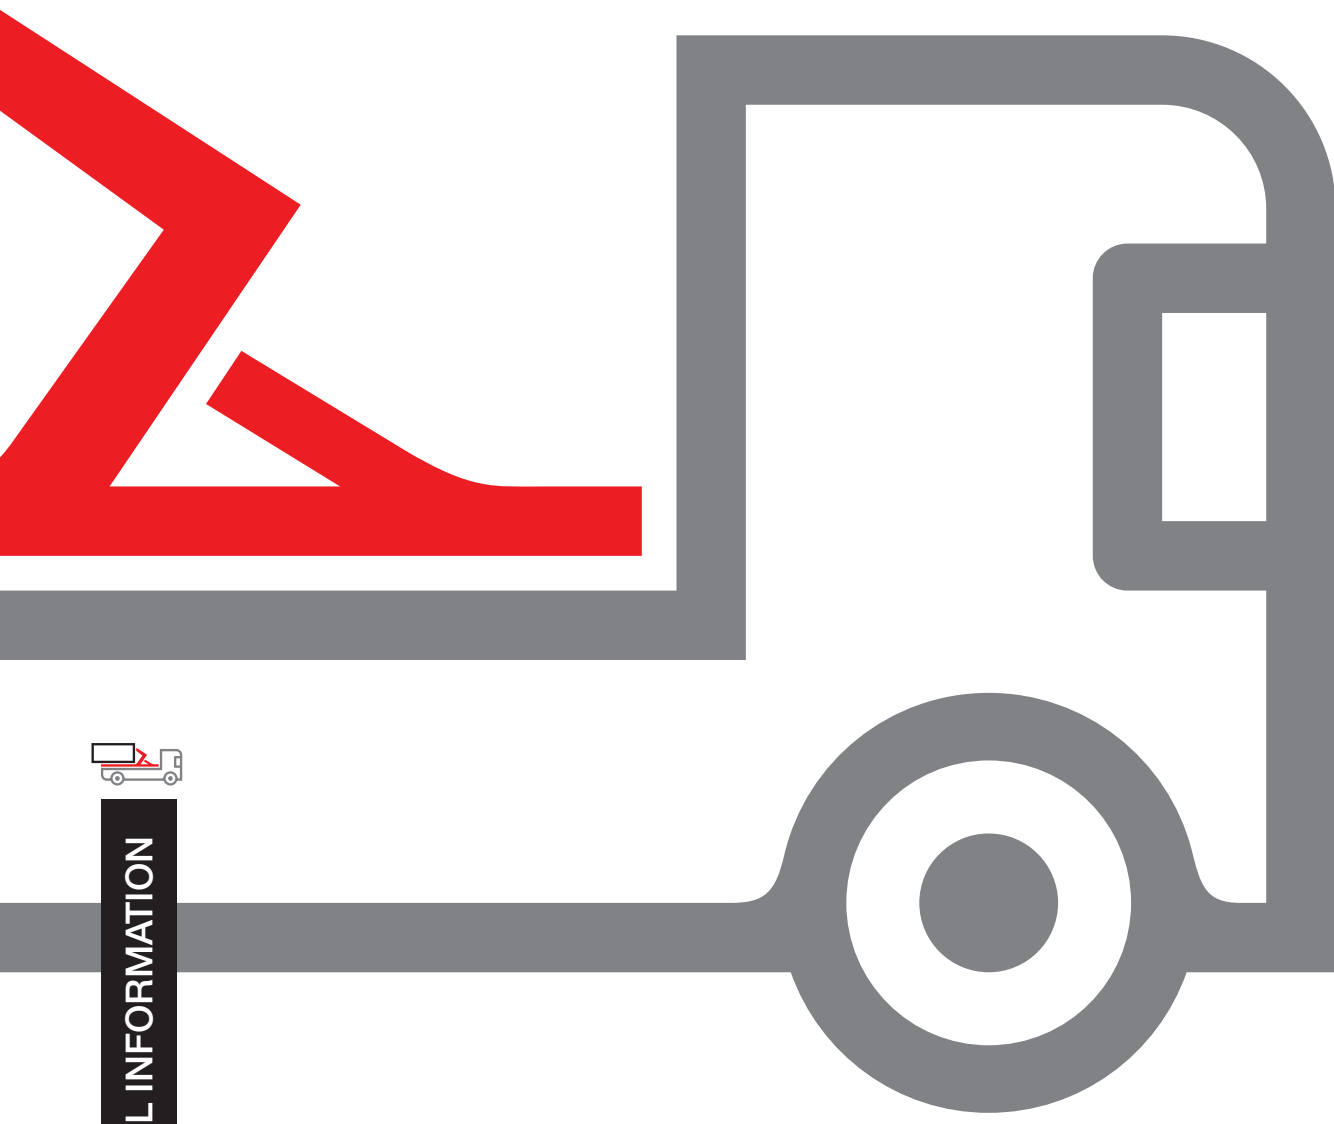

TECHNICAL INFORMATION

MULTILIFT ULTIMA 30S BASIC DATA

Type	ULTIMA 30S				
Vehicle type	4 axle				
GVW of the vehicle (t)	32-41				
Capacity (t)	30				
G-length	53	56	59	61	63
System weight (kg) *	2770	2790	2850	2870	2910
Tipping angle (°)	53		55	52	49
Max. operating pressure (MPa)	30				
Recommended oil flow (l/min)	120				

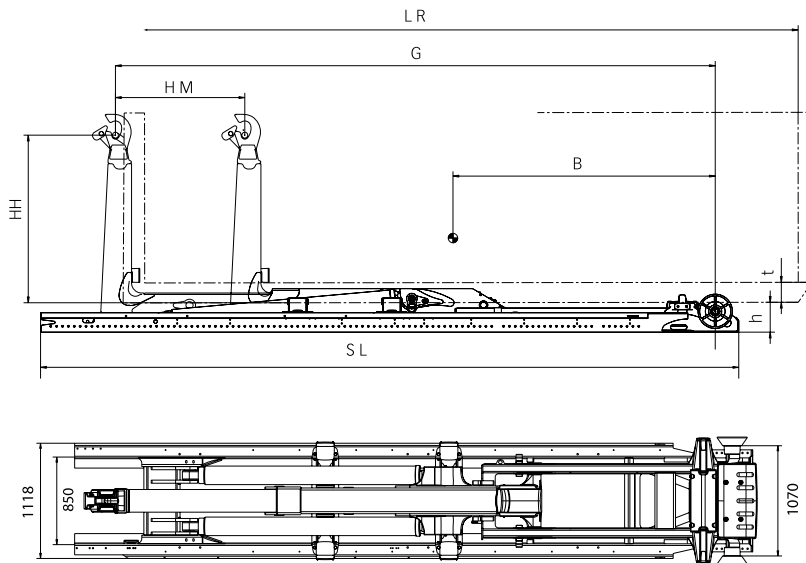

Primary dimensions

Technical data	ULTIMA 30S.53	ULTIMA 30S.56	ULTIMA 30S.59	ULTIMA 30S.61	ULTIMA 30S.63
LR = Body length (m) (min – max)	4.5 - 6.4	4.5 - 6.6	4.6 - 6.9	4.8 - 7.1	5.1 - 7.3
SL = Subframe length (mm) **	6563			6583	6883
B = Centre of gravity (mm)	2900	3000	3100	3250	3400
G = Exact G-length (mm)***	5360	5560	5860	6080	6310
HM = Horizontal movement (mm)	1100	1300	1450		
h = Installation height (mm)****	270 / 290				
t = Min free tunnel height (body) (mm)****	105 / 125				
HH = Hook height (mm)****	1400 / 1425 / 1450 / 1570 / 1575				
BW = Body width (mm)****	1070 / 1120 / 1152				

* Weight includes hydraulic body locking and excludes oil tank and oil.

** The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Hiab Multilift dealer.

*** Exact G-Length can be +20mm/-40mm from dimension in the table depending on the hook height and body standard

**** Varies depending on country and body standard

Hiab Multilift equipments meet the demands set forth in the EU Machine Directive and they are CE marked.

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.